


1. Log in to your device

For configuration, connect the CDS-5IPmini to the computer with a network cable.

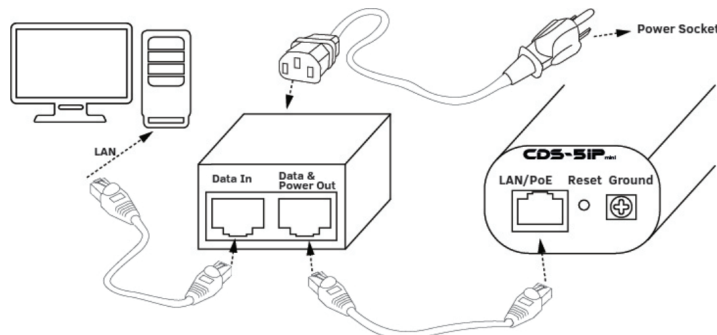

To log on to the CDS-5IPmini wireless module, set the IP address of the computer on the same subnet as the CDS-5IPmini (default 192.168.1.1), then launch your Internet browser (recommended Internet Explorer) and enter the IP address of the module. The login screen will appear:

In the above screen, enter the login information (default: User: **admin**, Password: **password**), then click the "Login" button to log into the module.

2. Check the software version



WARNING!

If you download software **1.2.6.3** to a version other than **1.2.6.1**, the device will be damaged and will need to be sent to the service.

To check the software version, go to the **Status** -> **Information** tab and check the firmware version. If the software version is different than **1.2.6.1**, you must first install it.

System Information	
MAC Address:	70:b3:d5:fe:9e:d6
Firmware Version:	1.2.6.3
System Uptime:	3m:06s
Device Name:	CDS-5IPmini
Country/Region:	European Union

LAN Settings	
IP Address:	192.168.1.1
Subnet Mask:	255.255.255.0
Gateway IP Address:	0.0.0.0

3. Software update

Link to instructions -> <http://camsat.com.pl/download/firmware/cds5ipmini-firmware-1263.zip>

If the software version is different than **1.2.6.1**, you must first install it.

3.1 To version 1.2.6.1

3.2 To version 1.2.6.3

3.1 Software upgrade to version 1.2.6.1

- a) Go to the **Management** -> **Firmware Upgrade** tab
- b) Press the „**Select file**” button and navigate to the directory in which the archive file with software was extracted
- c) Go to **5IPmini 6_1** folder and select the **CDS-5IPmini_2_6_1_21032016.img** file
- d) Press the „**Upgrade**” button

3.2 Software Upgrade to Version 1.2.6.3

- a) Go to the **Management** -> **Firmware Upgrade** tab
- b) Press the „**Select file**” button and navigate to the directory in which the archive file with software was extracted
- c) Go to **5IPmini 6_3** folder and select the **CDS-5IPmini_2_6_3_25042017.img** file
- d) Press the „**Upgrade**” button

If you have any problems with installing or questions, please contact technical support

Monday to Friday from 8.00 to 16.00

E-mail: service@camsat.com

Tel.: +48 52 387 10 97 (ext. 25 i 26)

Producer:

CAMSAT Gralak Przemysław

Ogrodowa 2a

86-050 Solec Kujawski

Offer and information: www.camsat.com

Service: serwis@camsat.com.pl